

Abstract

A device in a vehicle brake arrangement for determining the applied brake force comprises an enclosed elastically deformable medium, on which the reaction force from the brake force is to act. An axially movable push rod is in contact with the medium for transmitting a force therefrom, and sensor means are provided for sensing the force in the push rod.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
5 December 2002 (05.12.2002)


PCT

(10) International Publication Number  
**WO 02/096733 A1**

- (51) International Patent Classification<sup>7</sup>: **B60T 17/22**, F16D 66/00
- (21) International Application Number: PCT/SE02/00974
- (22) International Filing Date: 22 May 2002 (22.05.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
0101885-2 30 May 2001 (30.05.2001) SE
- (71) Applicant (for all designated States except US): **HALDEX BRAKE PRODUCTS AB** [SE/SE]; Box 501, S-261 24 Landskrona (SE).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **SEVERINSSON, Lars** [SE/SE]; Nordanåvägen 27, S-310 21 Hishult (SE).
- (54) Agent: **STRÖM & GULLIKSSON IPC AB**; P.O. Box 4188, S-203 13 Malmö (SE).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: A DEVICE IN A VEHICLE BRAKE ARRANGEMENT

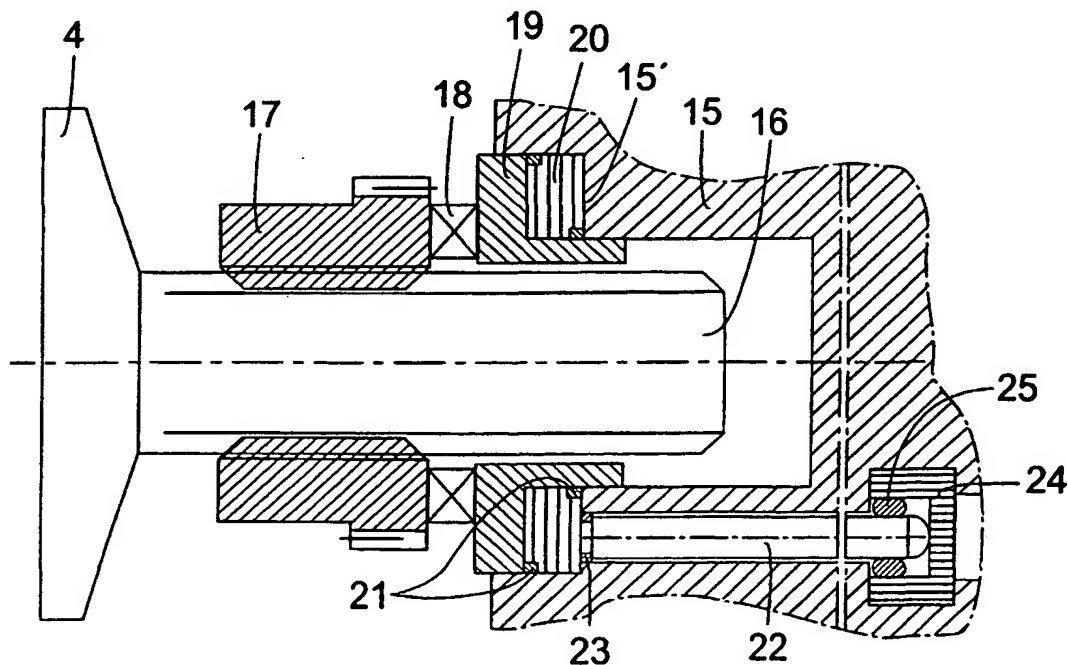

(57) Abstract: A device in a vehicle brake arrangement for determining the applied brake force comprises an enclosed elastically deformable medium (20), on which the reaction force from the brake force is to act. An axially movable push rod (22) is in contact with the medium (20) for transmitting a force therefrom, and sensor means (26; 28) are provided for sensing the force in the push rod.



WO 02/096733 A1